

# PRODUCT DATA SHEET

## STOP MULTI

white

BF

### Application

all applications



### Description:

- fast drying
- suitable on all substrates
- good filling properties
- fast sandable

### Substrates:

- = very well suited
- = well suited
- = suited in some cases

Steel	●●
Galv. Steel	●●
Stainless steel	○
Aluminium	●●
Anodized Aluminium	●●
GRP / SMC	●
PP-EPDM	●●
RM CV-Primer	●●
RM CV-Primer-Filler / Filler	●●
Powder	●
Coil-Coating	●●
Plywood	●
Wood	●●
OEM Paint work	●
Old paint work	●●

### Remarks:

The substrate should be clean, free of dust, rust, oil and grease

### Special remarks

- The products are suitable for professional use only.
- It cannot be ruled out that this product contains particles < 0.1 µm
- **2004/42/IIB (b)(250)180:** The EU limit value for this product (product category: IIB(d) in ready to use form is max.. 250 g/l. **The VOC content of this product is 180 g/l.**



### Paint process

Can be used for all CV Painting Processes.

### Spreading rate

### Solid content

86 %

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our products, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the products for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein are for general information purpose only; they may change without prior information and do not constitute the agreed contractual quality of the products (product specification). The latest version supersedes all previous versions. You can obtain the latest version from our website at [www.rmpaint.com](http://www.rmpaint.com) or directly from your sales partner. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed.

R-M Automotive Refinish Paints, Z.I.du Merret F-60676 Clermont de l'Oise Cedex, Tel. (+33) (0) 3 44 77 77 77

06/2016


Perfection made simple



# PRODUCT DATA SHEET

## STOP MULTI

white

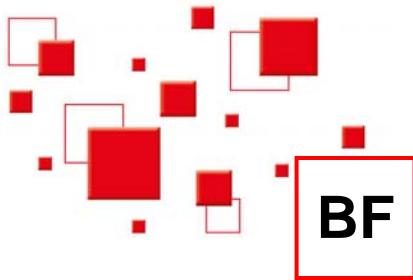

**Mixing ratio** 100:2-3 by weight



**Hardener** STOP HARDENER



**Reducer**

**Spray viscosity**  
DIN 4 / 20°C

Potlife 20 °C

4 min



**Drying**




over-coatable



tack free



tapeable



ready to assemble



sandable

Min. Max.

**Panel temperat.** 20°C

20-30 min

**Panel temperat.** 60°C

### Remarks



Can be sanded after 20-30 min  
Not suitable for applications that require elasticity, e.g., weld seams.  
Do not apply on etch wash primer or acid pre treated substrates!